
United States Department of Energy

Savannah River Site

**Explanation of Significant Difference (ESD) for
Incorporating Tanks 18 and 19 into the Revision 1 Interim
Record of Decision Remedial Alternative Selection for the F-
Area Tank Farm, Waste Tanks 17 and 20 (U)**

CERCLIS Number: 23

SRR-CWDA-2013-00007

Revision 1.1

July 2013

RECEIVED

AUG 19 2013

SITE ASSESSMENT,
REMEDATION &
REVITALIZATION

Prepared by:

Savannah River Remediation (SRR)

Savannah River Site

Aiken, SC 29808

Prepared for U.S. Department of Energy Under Contract No. DE-AC09-09SR22505

**ESD for Incorporating Tanks 18 and 19 into Rev. 1 IROD
F-Area Tank Farm, Waste Tanks 17 and 20
Savannah River Site
July 2013**

SRR-CWDA-2013-00007

Revision 1.1

Page i of iii

DISCLAIMER

This document was prepared in conjunction with work accomplished under Contract No. DE-AC09-09SR22505 for the U.S. Department of Energy. This work was prepared under an agreement with and funded by the U.S. Government. Neither the U.S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied: 1. warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or 2. representation that such use or results of such use would not infringe upon privately owned rights; or 3. endorsement or recommendation of any specifically identified commercial product, process, or service. Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.

Printed in the United States of America

**Prepared for
U.S. Department of Energy
and
Savannah River Remediation, LLC
Aiken, South Carolina**

TABLE OF CONTENTS

LIST OF FIGURES	ii
LIST OF ACRONYMS.....	iii
I. INTRODUCTION.....	1
II. SITE HISTORY AND SELECTED REMEDY.....	2
III. BASIS FOR THE EXPLANATION OF SIGNIFICANT DIFFERENCE	5
IV. DESCRIPTION OF SIGNIFICANT DIFFERENCE	5
V. STATUTORY DETERMINATIONS.....	5
VI. PUBLIC PARTICIPATION	6
VII. REFERENCES.....	6

LIST OF FIGURES

FIGURE 1: LOCATION OF THE SAVANNAH RIVER SITE.....	8
FIGURE 2: LAYOUT OF THE GENERAL SEPARATIONS AREA.....	9
FIGURE 3: GENERAL LAYOUT OF THE F-TANK FARM.....	10
FIGURE 4: CROSS-SECTIONAL VIEW OF TYPICAL TYPE IV TANK	11

LIST OF ACRONYMS

CERCLA	Comprehensive Environmental Response, Compensation and Liability Act
ESD	Explanation of Significant Difference
FFA	Federal Facility Agreement
FTF	F-Area Tank Farm
IROD	Interim Record of Decision
LLC	Limited Liability Company
LUC	Land Use Controls
NCP	National Oil and Hazardous Substances Pollution Contingency Plan
OU	Operable Unit
RCRA	Resource Conservation and Recovery Act
ROD	Record of Decision
SCDHEC	South Carolina Department of Health and Environmental Control
SRR	Savannah River Remediation, LLC
SRS	Savannah River Site
USDOE	United States Department of Energy
USEPA	United States Environmental Protection Agency

I. INTRODUCTION

This Explanation of Significant Difference (ESD) is being issued by the United States Department of Energy (USDOE), which functions as the lead agency for Savannah River Site (SRS) remedial activities, with concurrence by the United States Environmental Protection Agency (USEPA) and the South Carolina Department of Health and Environmental Control (SCDHEC). The purpose of this ESD is to announce the incorporation of Waste Tanks 18 and 19 at the F-Area Tank Farm (FTF) into the interim response action selected in the *Interim Record of Decision Remedial Alternative Selection for the F-Area Tank Farm, Waste Tanks 17 and 20* (SRR-CWDA-2012-00111).

Under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) Section 117(c), SRS is required to publish an ESD whenever there is a significant change to a component of a remedy specified in a Record of Decision (ROD). Sections 300.435(c)(2)(i) and 300.825(a)(2) of the National Oil and Hazardous Substances Pollution Contingency Plan (NCP) require the lead agency to provide an explanation of the difference and to make this information available to the public in the Administrative Record File and information repositories.

USDOE manages certain waste materials at the SRS that are regulated under the Resource Conservation and Recovery Act (RCRA), a comprehensive law requiring responsible management of hazardous waste. USDOE

received a RCRA hazardous waste permit from the SCDHEC, which was most recently renewed on September 30, 2003 (SC1 890 008 989). Module VIII of the Hazardous and Solid Waste Amendments portion of the RCRA permit mandates corrective action requirements for non-regulated solid waste management units subject to RCRA 3004(u). The SRS Federal Facility Agreement (FFA) lists the FTF as a RCRA/CERCLA Operable Unit (OU). The SRS FFA, Section IX.E, addresses the eventual removal of tanks and ancillary equipment from service and any appropriate CERCLA response action relating to the waste tank systems (WSRC-OS-94-42).

The USDOE intends to remove from service the waste tanks that do not meet the standards established in Appendix B (High Level Radioactive Waste Tank Systems) of the SRS FFA, pursuant to Section 120 of CERCLA and Sections 3008(h) and 6001 of RCRA, as amended by the Hazardous and Solid Waste Amendments of 1984 (hereafter jointly referred to as RCRA) and the Atomic Energy Act of 1954. Until the FTF waste tanks and ancillary equipment are removed from service, they are regulated under the Industrial Wastewater Construction Permit #17,424-IW, issued to SRS under the South Carolina Pollution Control Act, S. C. Code Ann., Section 48-1-10, et seq. (DHEC_03_03-1993) and applicable regulations implementing that Act. Waste tanks and ancillary structures are removed from the conditions of Industrial Wastewater Construction Permit #17,424-IW when operationally closed and removed from service in accordance with an

approved General Closure Plan and tank-specific Closure Module.

The Interim ROD (IROD) for FTF Waste Tanks 17 and 20 selected Annual Visible Engineered Barriers Inspection and Maintenance. The interim action is limited to any maintenance deemed necessary from the annual inspections from the time of removal of a waste tank or associated ancillary equipment from service until a final ROD is issued for the FTF OU. The IROD explained that an ESD would be used to incorporate the interim remedy for additional FTF waste tanks, group of waste tanks, and associated ancillary structures when satisfactorily removed from service in accordance with a SCDHEC approved closure model. USDOE has submitted and implemented an FTF General Closure Plan (LWO-RIP-2009-00009) and the Waste Tanks 18 and 19 Closure Module (SRR-CWDA-2010-00003) that describes the waste removal, characterization of residuals, associated risk, and stabilization of the waste tanks. This ESD incorporates FTF Waste Tanks 18 and 19 into the interim remedy selected in the IROD.

This ESD is part of the Administrative Record File and is available for public review during normal business hours at the following repositories.

US Department of Energy
Public Reading Room
Gregg-Graniteville Library
University of South Carolina – Aiken
171 University Parkway
Aiken, South Carolina 29801
(803) 641-3465

Thomas Cooper Library
Government Documents Department
University of South Carolina
Columbia, South Carolina 29208
(803) 777-4866

II. SITE HISTORY AND SELECTED REMEDY

This ESD documents the incorporation of FTF Waste Tanks 18 and 19 into the selected interim response action for the FTF waste tanks and ancillary equipment as found in the *Interim Record of Decision Remedial Alternative Selection for the F-Area Tank Farm, Waste Tanks 17 and 20* (SRR-CWDA-2012-00111).

F-Area Tank Farm

The FTF is located at the SRS in Aiken County, South Carolina (Figure 1). The FTF is a 22-acre site within the General Separations Area, which encompasses E-, F-, H-, J-, S-, and Z-Areas (Figure 2). FTF consists of 22 liquid waste storage tanks, two evaporator systems, over 45,000 linear feet of transfer pipelines, six diversion boxes, one catch tank, a concentrate transfer system tank and three pump pits. Figure 3 shows the general layout of FTF. There are three major waste tank types in FTF that range in size from 750,000 gallons (Type I tanks) to 1.3 million gallons (Type III and Type IV tanks) that have varying degrees of secondary containment and intra-tank interference, such as cooling coils and columns. FTF was constructed to receive waste generated by various SRS production, processing, and laboratory facilities. The use of FTF isolated these wastes from the environment, SRS workers, and the public. With

FTF and its sister facility, H-Area Tank Farm, facilities are in place to pretreat the accumulated sludge and salt solutions (supernate) to enable the management and treatment of these wastes within other SRS facilities (i.e., Defense Waste Processing Facility and Saltstone Production Facility). These treatment facilities convert the sludge and supernate to more stable forms suitable for permanent disposal in a Federal Repository or the Saltstone Disposal Facility, as appropriate.

FTF Waste Tanks 18 and 19 are Type IV tanks constructed in the late 1950s. These waste tanks have a single carbon steel liner with a spherical reinforced concrete domed roof. Type IV waste tanks are 85 feet in diameter and approximately 34 feet high at the side wall, with a nominal operating capacity of 1.3 million gallons. There is no secondary containment structure for Type IV tanks. The concrete vault for Type IV tanks was built around the primary tank using a technique called "Shotcrete". The core wall was constructed of 0.75 to 1.5-inch thick layers of "Shotcrete". The core wall is 7 inches thick at the top and 11 inches at the bottom [SRS-REG-2007-00002]. Figure 4 provides a cross-sectional sketch of a typical Type IV tank.

The Type IV tanks have side wall penetrations for 3-inch stainless steel inlet and outlet transfer lines and 4-inch cascade line penetrations. The transfer lines and cascade lines penetrate the enclosing concrete vault and the primary steel liner just below the dome ring, approximately 34.5 feet above the tank bottom. In addition to the liquid transfer line penetrations, carbon steel ventilation

pipes traverse the vault through the riser wall [SRS-REG-2007-00002].

F-Area Tank Farm Closure Activities

FTF Waste Tanks 18 and 19 were operationally closed and removed from service by August 2012 in accordance with an approved General Closure Plan (LWO-RIP-2009-00009) and tank-specific Closure Module (SRR-CWDA-2010-00003). No ancillary structures were included in the removal from service of FTF Waste Tanks 18 and 19. The tanks were isolated from the remaining operating facility and filled with grout. Some equipment installed in the tanks or used in the closure activities (e.g., slurry pumps, transfer jet, thermowells) were entombed in the grout as part of the stabilization process.

USDOE is in the process of removing the remaining FTF waste tanks and ancillary structures from service in accordance with the FTF General Closure Plan (LWO-RIP-2009-00009) and tank system-specific closure modules. FTF waste storage and removal operations are governed by Industrial Wastewater Construction Permit #17,424-IW issued by SCDHEC on January 25, 1993 and the FFA. The State of South Carolina has authority for approval of wastewater treatment facility operational closure under Chapter 61, Article 82 of the SCDHEC Regulations. The *Ronald Reagan National Defense Authorization Act (NDAA) for Fiscal Year 2005*, Section 3116 (a) specifies the criteria for USDOE to use to determine whether residuals remaining in the waste tank systems can be managed as non-high level waste at a USDOE site in a "covered state" (e.g.,

South Carolina) where activities are regulated by the state's approved closure plan or permit, authority for the approval or issuance of which is conferred on the State outside of Section 3116. The *Basis for Section 3116 Determination for Closure of F-Tank Farm at the Savannah River Site* (DOE/SRS-WD-2012-001) was prepared for FTF, based in part on the environmental protection information provided in the FTF performance assessment (SRS-REG-2007-00002). Based on the information in the Section 3116 Basis Document and the performance assessment, the Secretary of Energy, in consultation with the Nuclear Regulatory Commission, determined that the residual material in the waste tank systems could be managed as non-high level waste.

In accordance with the SRS FFA, when all FTF waste tanks and ancillary structures have been removed from service, an appropriate response action will be developed for the FTF OU, which includes the stabilized waste tanks and ancillary structures as well as the surrounding environmental media and groundwater directly below the FTF.

The FTF General Closure Plan requires monitoring of the groundwater under an approved FTF Groundwater Monitoring Plan, which describes the monitoring of the groundwater exiting the FTF. The Groundwater Monitoring Plan supports both the operation and removal from service of the FTF waste tanks and includes requirements for reporting the monitoring results [SRNS-RP-2011-00995]. The Groundwater Monitoring Plan remains in effect until all waste tanks have been removed from service, at which time a remedial decision will be made for the FTF OU which

includes the stabilized tanks, the surrounding soils and the groundwater below the FTF. Because these monitoring requirements are already in place, groundwater monitoring is not being considered as part of this interim action.

Selected Remedy

This ESD documents the incorporation of FTF Waste Tanks 18 and 19 into the selected interim response action for the FTF Waste Tanks 17 and 20.

The selected remedy, Annual Visible Engineered Barriers Inspection and Maintenance, includes annual inspections of the engineered barriers (e.g., visible grout) for physical integrity. In addition, the area will be inspected for excessive water accumulation that may cause premature degradation of the engineered barriers associated with stabilization of the waste tanks. The interim action is limited to any maintenance deemed necessary from the annual inspections from the time of removal of a waste tank or associated ancillary equipment from service until a final ROD is issued for the FTF OU. This alternative was selected because it is protective of human health and the environment, and the requirement for annual inspections is consistent with the maintenance and monitoring requirements of the FTF General Closure Plan and the tank-specific closure module.

The Interim Corrective Measures Implementation /Remedial Action Implementation Plan (ICMI/RAIP) will be written to include all tanks in the FTF that are included in the IROD and

subsequent ESDs. Initially this will include Tanks 17, 18, 19 and 20. As additional tanks in FTF are closed, an ESD will be used to apply the interim remedy selected in the IROD to those FTF waste tanks and associated ancillary structures removed from service. Because there is no change to the implementation of the interim remedial action selected in the IROD, the ESD will also refer to the same ICMI/RAIP for implementation of the selected remedy.

The current land use for the FTF is industrial with USDOE maintaining control of the land. The FTF is currently in the operational phase and access is controlled by SRS facility security and administrative controls. Land use controls (LUCs) are not part of the interim action. LUCs may be included in the final ROD for the FTF OU in order to prevent inadvertent exposure to remaining contaminated media and to ensure the integrity of the closed tanks by restricting land and groundwater uses within the FTF OU. The Land Use Control Implementation Plan will be deferred until final closure of the entire FTF OU.

III. BASIS FOR THE EXPLANATION OF SIGNIFICANT DIFFERENCE

The purpose of this ESD is to document a post-IROD change by incorporating FTF Waste Tanks 18 and 19 into the selected interim remedial action for FTF Waste Tanks 17 and 20 to include Annual Visible Engineered Barriers Inspection and Maintenance.

FTF Waste Tanks 18 and 19 have been operationally closed and removed from service under an FTF General Closure Plan (LWO-RIP-

2009-00009) and a tank-specific Closure Module (SRR-CWDA-2010-00003). These tanks are located in the same FTF area as Waste Tanks 17 and 20 and will be inspected and maintained until final closure of the FTF OU.

IV. DESCRIPTION OF SIGNIFICANT DIFFERENCE

The same interim action remedy selected for FTF Waste Tanks 17 and 20 is applied to FTF Waste Tanks 18 and 19. The selected remedy, Annual Visible Engineered Barriers Inspection and Maintenance, is protective of human health and the environment and will comply with applicable federal and state laws. In addition, it is consistent with the maintenance and monitoring requirements of the FTF General Closure Plan and the tank-specific closure module. The addition of FTF Waste Tanks 18 and 19 to the selected interim remedy does not impact the cost of implementation.

V. STATUTORY DETERMINATIONS

The addition of FTF Waste Tanks 18 and 19 to the interim remedial action enhances protection of human health and the environment, complies with federal and state requirements that are legally applicable or relevant and appropriate to the remedial action. Because the ESD does not fundamentally change the interim remedy, the Applicable or Relevant and Appropriate Requirements discussion presented in the IROD is not reevaluated in this ESD. This interim remedial action does not constitute the final remedy for the FTF and the statutory preference for remedies that

**ESD for Incorporating Tanks 18 and 19 into Rev. 1 IROD
F-Area Tank Farm, Waste Tanks 17 and 20
Savannah River Site
July 2013**

**SRR-CWDA-2013-00007
Revision 1.1
Page 6 of 12**

employ treatment that reduces toxicity, mobility, or volume as a principal element will be addressed by the final response action. A final remedial action will be evaluated and conducted in the future for the entire FTF OU according to the requirements of the FFA.

Dean Campbell
Savannah River Remediation, LLC
Public Involvement
Savannah River Site
Building 766-H
Aiken, South Carolina 29808
(803) 208-8270
dean.campbell@srs.gov

Based on information currently available, the lead agency believes the selected remedy provides the best balance of tradeoffs among the other alternatives with respect to the evaluation criteria. The USDOE expects the selected remedy to satisfy the statutory requirements in CERCLA Section 121(b) to: (1) be protective of human health and the environment and (2) be cost-effective. In accordance with Section 121(c) of CERCLA and NCP §300.430(f)(5)(iii)(c), a statutory review will be conducted within 5 years of initiation of the remedial action, and every 5 years thereafter, to ensure that the interim remedy continues to be protective of human health and the environment.

VI. PUBLIC PARTICIPATION

The public will be informed of the changes to the selected remedy as specified in this ESD through mailings of the *SRS Environmental Bulletin*, a newsletter sent to approximately 3,500 citizens in South Carolina and Georgia, and through notices in the *Aiken Standard*, the *Allendale Citizen Leader*, the *Augusta Chronicle*, the *Barnwell People-Sentinel*, and *The State* newspapers.

To obtain more information concerning this ESD, contact:

VII. REFERENCES

DHEC_03_03-1993, Chapman, J. W., *Partial Permit to Operate F and H Area High Level Radioactive Waste Tank Farms Construction Permit No.: 17,424-IW*, South Carolina Department of Health and Environmental Control, Columbia, SC, Rev. 0, March 3, 1993.

DOE/SRS-WD-2012-001, *Basis for Section 3116 Determination for Closure of F-Tank Farm at the Savannah River Site*, Savannah River Site, Aiken, SC., Rev. 0, March 2012.

LWO-RIP-2009-00009, *Industrial Wastewater General Closure Plan for F-Area Waste Tank Systems*, Savannah River Site, Aiken, SC, Rev. 3, January 24, 2011.

SRNS-RP-2011-00995, *F-Area Tank Farm Groundwater Monitoring Plan*, Savannah River Site, Aiken, SC, Rev. 1, February 2012.

SRR-CWDA-2010-00003, *Industrial Wastewater Closure Module for the Liquid Waste Tanks 18 and 19*, Savannah River Site, Rev. 2, January 2012.

SRR-CWDA-2012-00111, *Interim Record of Decision Remedial Alternative Selection for the F-Area Tank Farm, Waste Tanks 17 and 20*, Rev. 1, Savannah River Site, Aiken, SC.

SRS-REG-2007-00002, *Performance Assessment for F-Tank Farm at the Savannah River Site*, Savannah River Site, Aiken, SC, Rev. 1, March 31, 2010.

WSRC-OS-94-42, *Federal Facility Agreement for the Savannah River Site*, Administrative Docket No. 89-05-FF (Effective Date: August 16, 1993).

**ESD for Incorporating Tanks 18 and 19 into Rev. 1 IROD
F-Area Tank Farm, Waste Tanks 17 and 20
Savannah River Site
July 2013**

**SRR-CWDA-2013-00007
Revision 1.1
Page 7 of 12**

This page intentionally left blank.

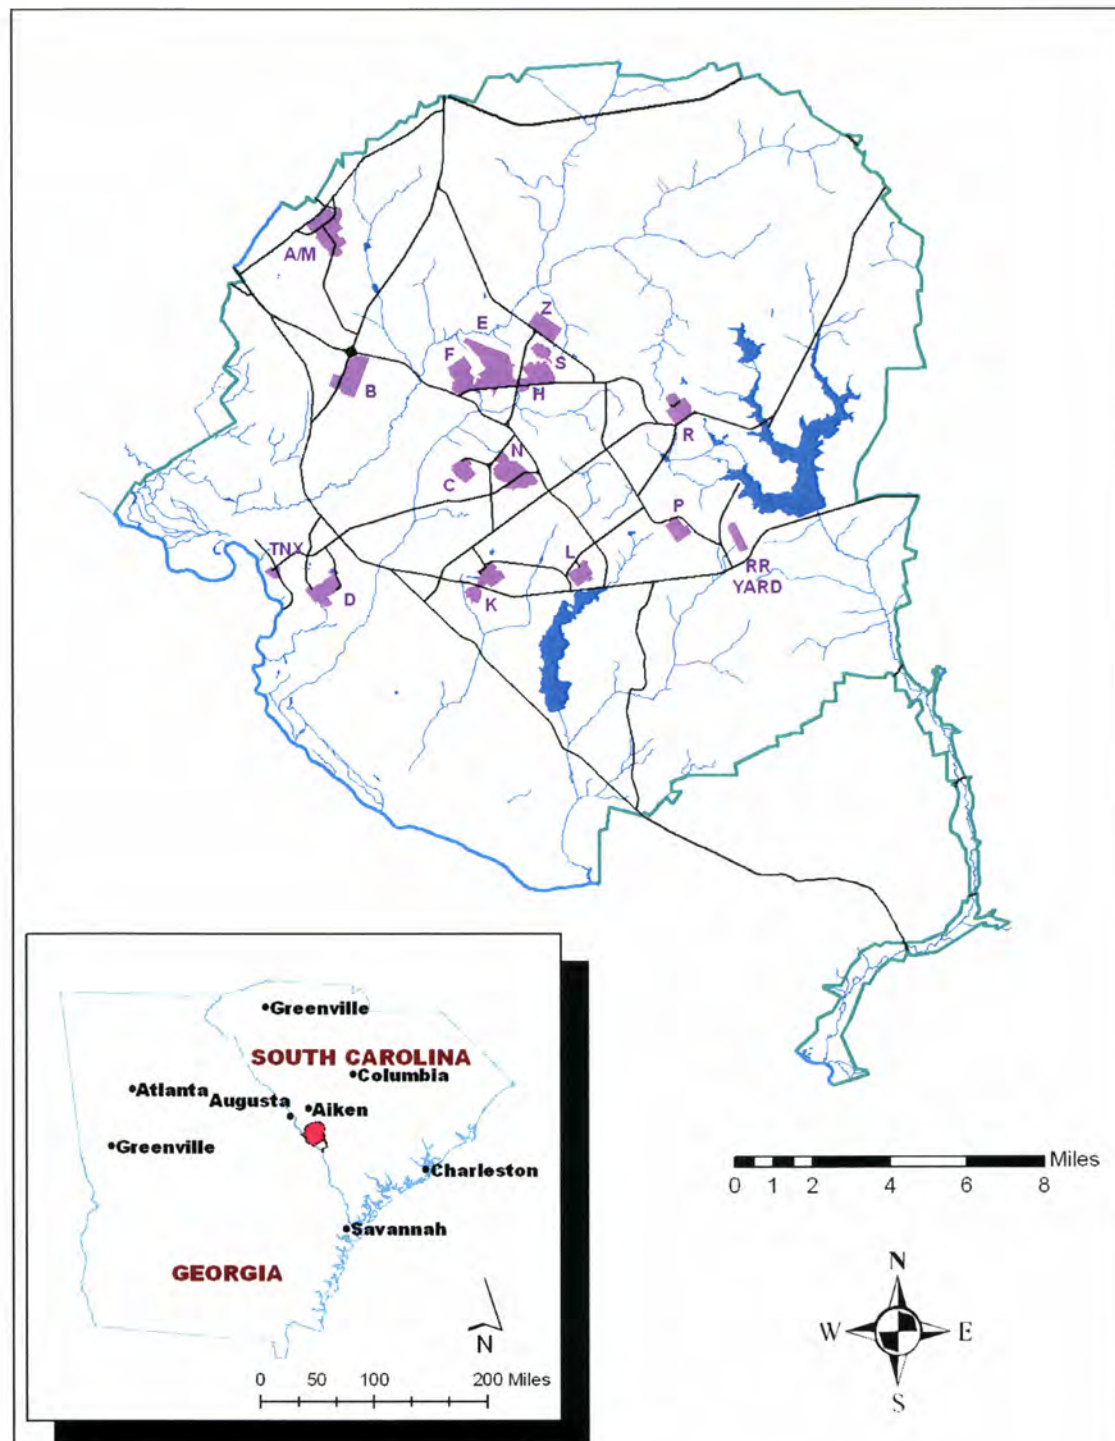


FIGURE 1: LOCATION OF THE SAVANNAH RIVER SITE

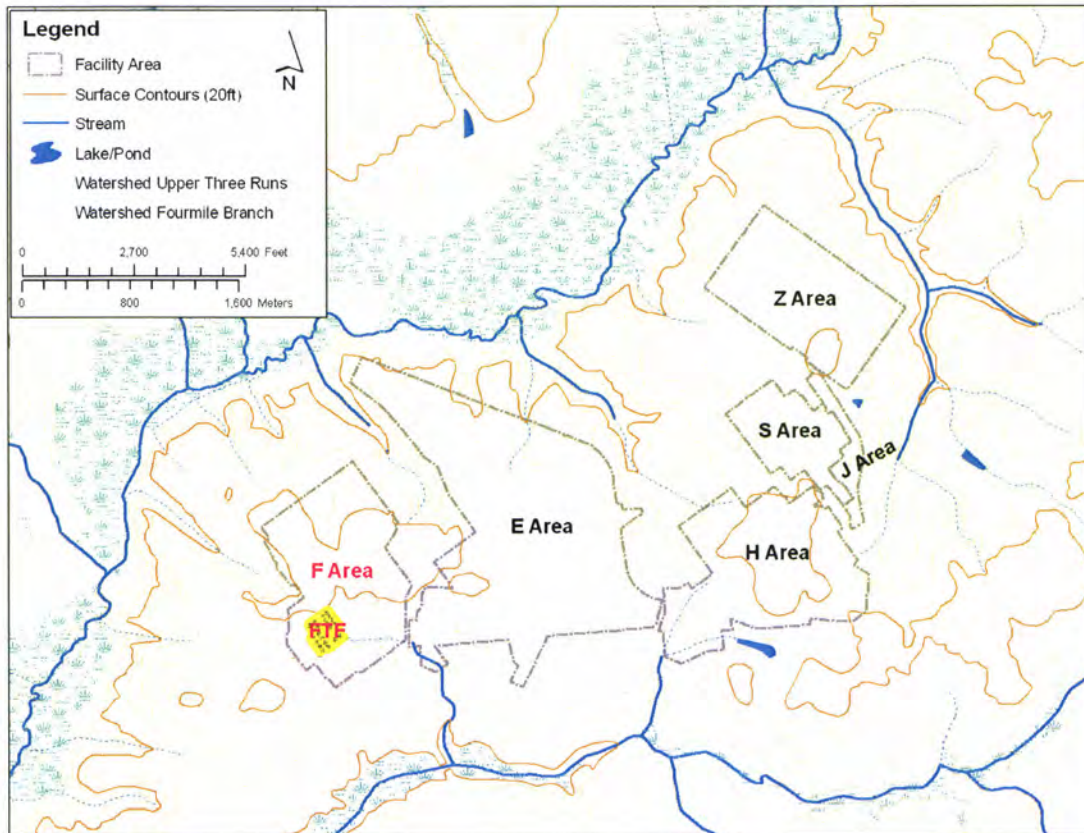


FIGURE 2: LAYOUT OF THE GENERAL SEPARATIONS AREA

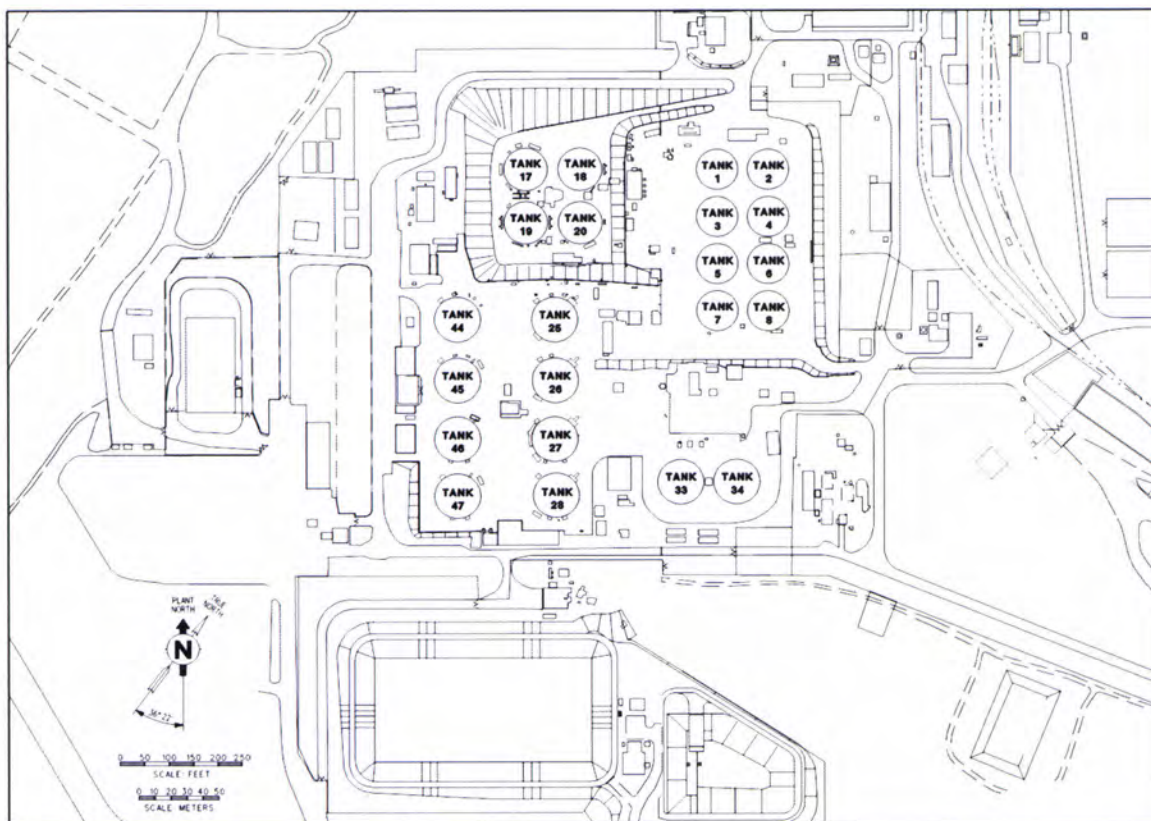


FIGURE 3: GENERAL LAYOUT OF THE F-TANK FARM

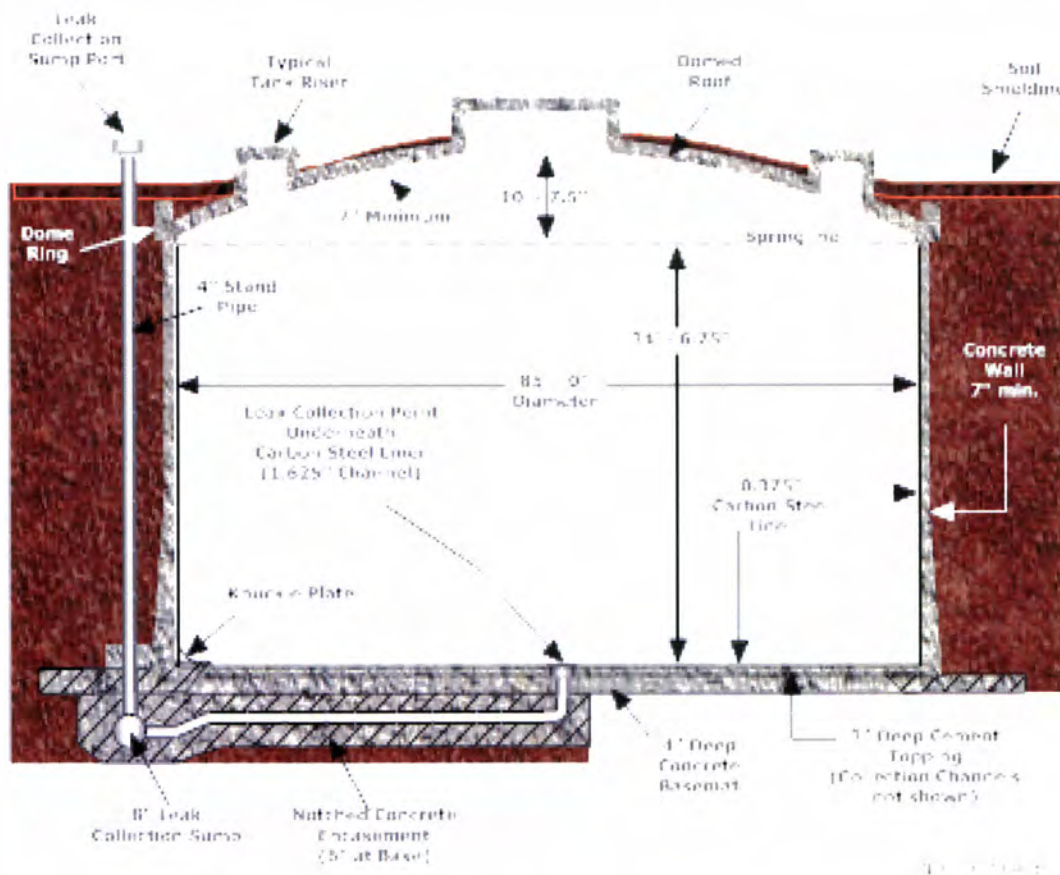
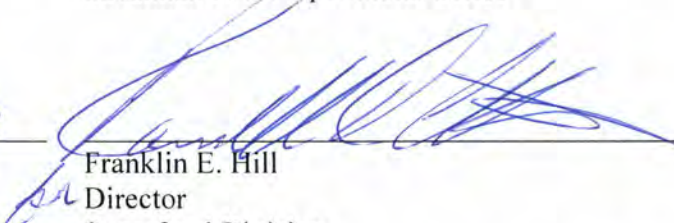



FIGURE 4: CROSS-SECTIONAL VIEW OF TYPICAL FTF TYPE IV TANK

ESD for Incorporating Tanks 18 and 19 into Rev. 1 IROD
F-Area Tank Farm, Waste Tanks 17 and 20
Savannah River Site
July 2013

SRR-CWDA-2013-00007
Revision 1.1
Page 12 of 12

July 16, 2013
Date 
Karen Guevara
Assistant Manager for Infrastructure and Environmental Stewardship
U. S. Department of Energy
Savannah River Operations Office

8/15/13
Date 
Franklin E. Hill
Director
Superfund Division
U. S. Environmental Protection Agency - Region 4

8/26/13
Date 
Daphne G. Neel
Bureau Chief
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control